



Elkhorn Treatment Center Boyd Andrew Treatment Center Boulder, Montana Design Build/Guaranteed Maximum Contract


Square Footage: 22,400 sqft
Budget: \$3.4 Million
Actual Cost: \$3.4 Million
Project Delivery Mode: Design/Build
Design Started: April 1, 2006
Design Completion: June 1, 2006
Construction Started: June 5, 2006
Construction Completed: April 9, 2007
Construction Type: Wood Framed
Single Level

Architect: John McKittrick
Schlenker & McKittrick
Architects
(406)442-4933
Contact: Mike Ruppert

Boyd Andrew
Community Services
P O Box 1153
Helena, MT 59624
406-443-2343
mrm@mt.net



This building is a minimum security, 24-hour methamphetamine treatment facility for women. The project was fast tracked, with the construction starting prior to the completion of the final design. The structure is a, single story, slab on grade, with the wood framed walls bearing the load of the wood roof trusses. The exterior is comprised of brick, pre-finished fiber-cement lap siding, pre-finished architectural vertical steel siding panels. The roof consists of a low-slope membrane system and asphalt shingles on the higher sloped sections. The site work included landscaping, sidewalks, curb and gutter, asphalt pavement, sanitary sewer, domestic water, natural gas, and electrical power.

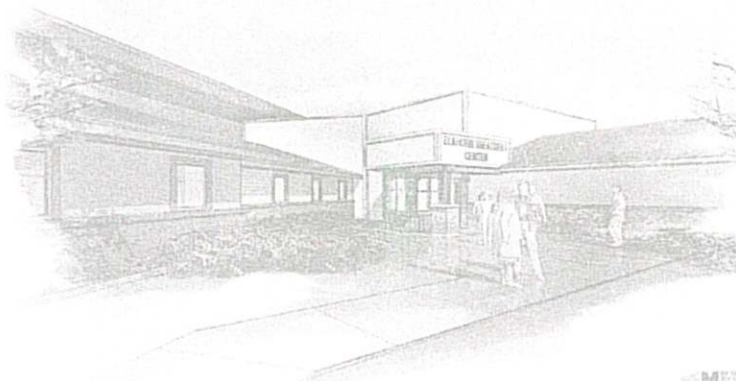

ETC ENTRANCE VIEW

